



RIGEL Linear Datasheet

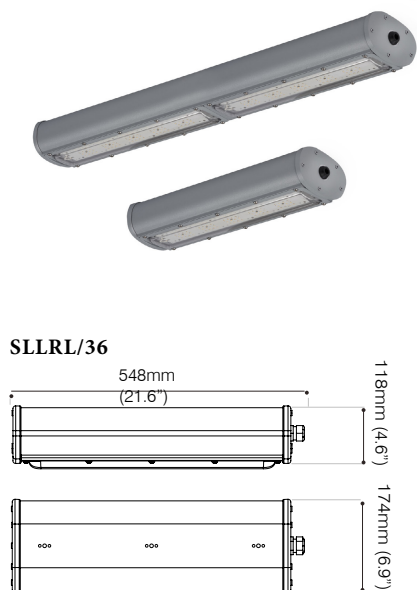

SLLRL/36

Specification

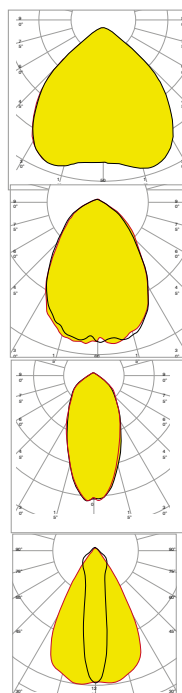


90x90

60x60

30x30

Asymmetrical Optics
Aisle - 80x30

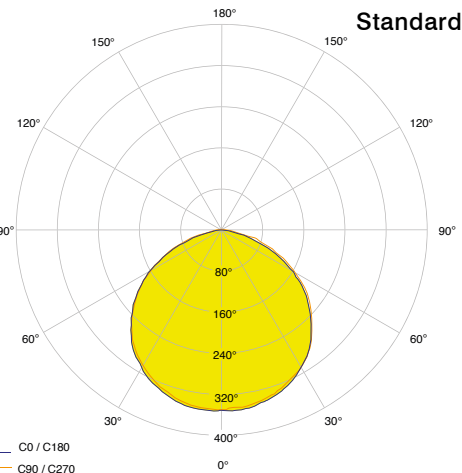

Standard



Product & Code:	SLLRL/36 36w Rigel Linear
Guarantee:	5 years
Lumen Output:	5553
Lumens Per Watt:	154.25
IP Rating:	IP66 & IP67
IK Rating:	IK10
CRI:	>80
Beam Angle:	90°x90, 60°x60, 30°x30, 80°x30
Dimming Interface:	Dali 2.0
Number of LEDs:	80
Temperature Range:	-40°C to +60°C
Em Temperature Range:	-20°C to +50°C
Emergency Duration:	Up to 3hrs @ 20% power
Emergency Battery:	NiMH 6V
Emergency Charge Time:	20 hours
Emergency Function:	Self-testing intelligent emergency

Input:	186-264VAC 50/60Hz
Power:	Standard 36w / Emergency 39w
Power Factor:	>0.95
Termination:	Incoming terminal block suitable for 4 core 4mm ² (6mm ² available)
Cable Entry:	1x M25 Cable entry M20 available on request.
Weight:	Standard 6KG & Emergency 7KG
Function:	Self-testing intelligent emergency
Colour Temp:	4000k
LED Type:	Platinum Elite SMT LEDs
Enclosure & Mounting:	Marine grade aluminium epoxy powder coated, UV stabilised polycarbonate, all external fasteners and brackets are marine grade stainless steel. Mounting Via M8/M6 tapped holes, various mounting arrangements available. Supplied with 2x M8 eyebolts

Termination:

2m long 3 core & 2 core flying lead on standard version
2m long 4 core & 2 core flying lead on emergency version
(Optional No Cable (NC) version with incoming terminal block suitable for 4 core 4mm² cable)

LIFE. ILLUMINATED

Call today on 0151 420 6000
email sales@signatureledlighting.co.uk

For more products visit www.signatureledlighting.co.uk