SIGNATURE
LED LIGHTING

Pallas

Specification Sheet

LIFE ILLUMINATED

Specification

Wattage:	18w - 22w
Guarantee:	5 years
Lumen Output:	1561 - 2241
Lumens Per Watt:	101
IP Rating:	IP65
IK Rating:	IK09
CRI:	>85
Inrush Current:	<60A
Colour Temperature:	4000K
Beam Angle:	120°
Voltage Range:	AC220-240V
LEDs:	Epistar (2-3 bin)
Operating Temperature:	-20°C to +45°C
LED Forward Current:	0°C - 40°C for emergency

Suffix	Option
/BK	Black Body
/GY	Grey Body
/DD	DALI Dimming
/MW	Microwave Sensor
/E	Emergency
/MW/E	Microwave Energy

SDCM:	<4
Class:	Class I
Power Factor:	>0.95
Diffuser Type:	Polycarbonate-TPa rated
Mounting Options:	Surface Mounted
Material:	Cast Aluminium
Unit Weight (Kg):	2.4
Life Time of LED @Ta=25°C:	70,000 hrs-L70 B50
Life Time of LED @Ta=25°C:	50,000 hrs-L80 B50
Life Time of LED @Ta=25°C:	25,000 hrs-L90 B50
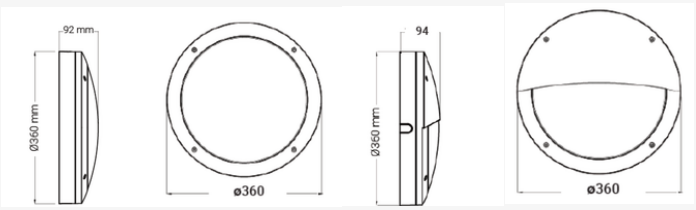
Part Code	Cover	Lumens
SLL18PB/BS	Standard	1831
SLL22PB/GS	Standard	2241
SLL18PBE	Eyelid	1561
SLL22PGE	Eyelid	1910