SIGNATURE
LED LIGHTING

Liv Bollard Family

Specification Sheet

LIFE ILLUMINATED

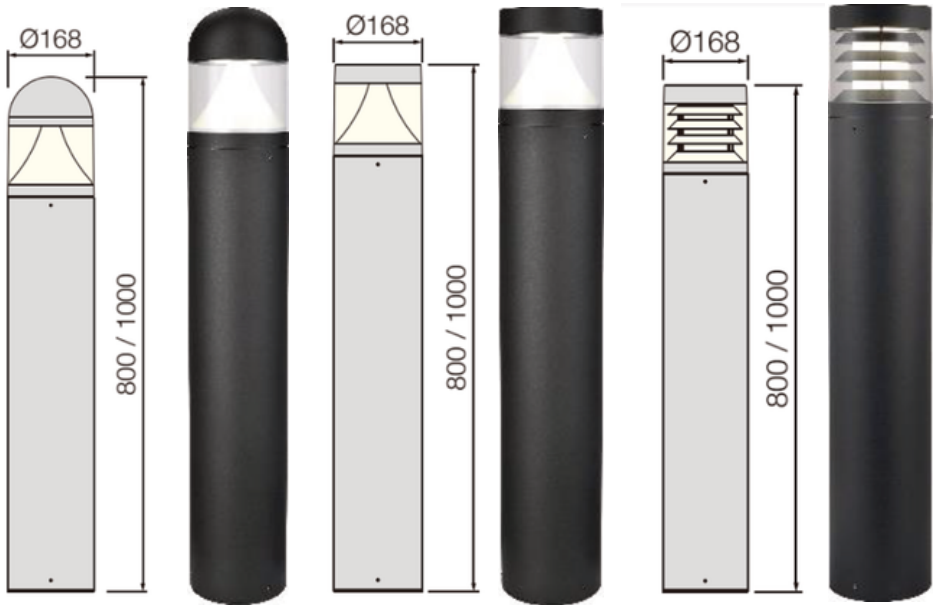

Product Code	Description	Lumens/Current	LED Forward Voltage	LED Chips
LIV/25/DOM/BK/CCT	LIV bollard, Dome head	2000	3.0V / 150mA	2835 (48+48)
LIV/25/FLT/BK/CCT	LIV bollard, Flat head	2000	3.0V / 150mA	2835 (48+48)
LIV/25/LVR/BK/CCT	LIV bollard, louver reflector	875	3.0V / 60mA	2835 (144+144)

Specification

Product :	Liv Bollard
Family Wattages:	25w
Guarantee:	3 years
Lumen Output:	875 - 2000
Lumens Per Watt:	35 - 80
IP Rating:	IP65
IK Rating:	IK09
CRI:	>80
Inrush Current:	20A Max
Colour Temperature:	3000K / 4000K
Beam Angle:	1000 x 168
Voltage Range:	AC100-240V

LEDs:	SMD 2835
Operating Temperature:	-25°C to +45°C
LED Chip Lifetime (L70):	34,000 Hours
SDCM:	<6
Class:	Class I
Power Factor:	>0.95
Running Current: Inrush	600mA
Current:	20A Max
Material:	Die-cast aluminium, RAL9005 Sand
Driver:	Eaglerise CH-25-600
Installation Method:	Floor mounted
LED Chip Lifetime (L70):	>34,000 hours