

Boxer Downlight Family Datasheet

Code	Wattage	Lumens 3k	Lumens 4k	Lumens 5700k	Size & Cutout	Driver
SLLRBX2/12/ST/WH/CCT	12w	1428	1561	1565	Ø145*53mm, Cut-out 120-130mm	VSI-13W320-NF1
SLLRBX2/18/ST/WH/CCT	18w	2150	2354	2379	Ø190*53mm, Cut-out 160-170mm	VSI-19W450-NF1(G)
SLLRBX2/25/ST/WH/CCT	25w	3140	3416	3434	Ø228*53mm, Cut-out 200-210mm	VSI-25W600-NF1(G)




Specification


Product :	Boxer LED Downlight
Family Wattages:	12w / 18w / 25w
Guarantee:	3 Years
Lumen Output:	1428 - 3434
Lumens Per Watt:	118 - 139 + 10%
Colour Temperature:	3000K/4000K/5700K
IP Rating:	IP54
CRI:	>80
LED Forward Voltage	33-38V
Beam Angle:	90°
SDCM:	<6
Input Voltage:	AC200-240V
Dimming:	Non dim
Operating Temperature:	-20°C to +40°C
Product Weight:	12w 0.4kg 18w 0.58kg 25w 0.78kg

Operating Hours:	>50,000
Class:	Class II
Power Factor:	>0.90
Current LED	320mA
Mounting Options:	Recessed
LED Chips:	Hongli/ 2835SMD
Applications:	Interior
Inrush Current/Running Current 12w:	15.1A/113uS - 0.08A
Inrush Current/Running Current 18w:	16A/214uS - 0.14A
Inrush Current/Running Current 25w:	16A/214uS - 0.14A


SLLRBX2/12/ST/WH/CCT

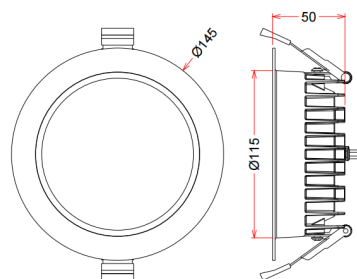

SLLRBX2/18/ST/WH/CCT

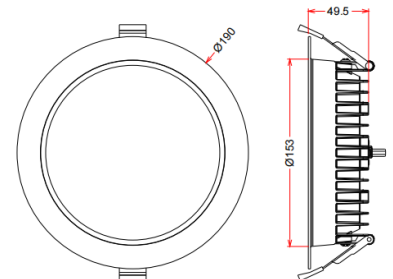

SLLRBX2/25/ST/WH/CCT

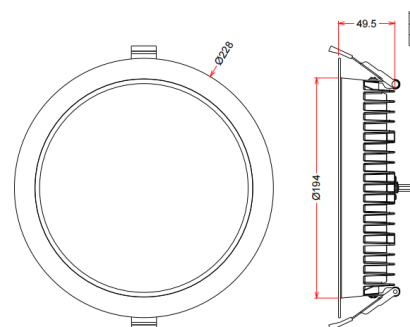

LIFE . ILLUMINATED

Call today on **0151 420 6000**
email sales@signatureledlighting.co.uk

For more products visit www.signatureledlighting.co.uk